

**Technical Data
Calix preheater 230V AC**
Calix preheater types:

CVH 101, CVH 102



Subject:	Data:	Note:
----------	-------	-------

1. Certification		
		EN 60335-1 SS 4330790

2. Electrical Data		
	Max. 250V/10A	EN 60335-1 SS 4330790

3. Temperature range		
Heater connector	-40°C to +125°C and 30min. +140°C	IEC 60068-2-14 SS EN 60068-2-14

4. Degree of protection		
	IP6K9K	SS EN 60 529


5. High pressure washing		
	Working pressure: 170 bar Water flow:17 l/min Water temperature:90°C Distance:300mm	SP (Swedish National Testing and Research Institute)

6. Chemical resistance		
------------------------	--	--


Chemicals	Type	Immersion Time/Temp.
	Volvo STD 7611;131 SAAB STD 5028	SP (Swedish National Testing and Research Institute)
Oil	IRM 902	48 h/90°C
Hydraulic oil	IRM 903	30 min/23°C
Grease	Gr 2 Diester	1 h/80°C
Grease	Gr 4 Silicone	1 h/80°C
Brake fluid	DOT 4	48 h/90°C
Battery fluid	25%H ₂ SO ₄	1 h/50°C
Petrol	ISO 1817 liquid C	30 min/23°C
Petrol with alcohol	ISO 1817 liquid 4	24 h/23°C
Diesel	IRM 903/10% paraxylene	48 h/90°C
Biofuel	SS 155436	24 h/23°C
Alcofuel	SS 155437	24 h/23°C
Solvent	15-17% aromatic content	1 h/23°C
Window washing fluid	10% isopropanol, 40% ethanol , 50% water	1 h/23°C
Antifreeze	Volvo No. 1381079-1	1 h/80°C
Road salt	5% CaCl ₂ /NaCl 95% water	48 h/23°C

7. Coolant pressure		
	3 bar pressure	Calix TM 01-127

Subject:	Data:	Note:
8. Environment		
	IMDS	https://public.mdsystem.com/en/web/imds-public-pages/home
	REACH	REACH (EG) 1907/2006
9. Recycling		
	100% recoverable	Swedish Environmental Protection Agency 2017/04/09
10. Corrosion		
		SS 433 07 90 ISO 9227
11. Durability		
	9000 h	Calix TM 01-119
12. Connector geometry		
		1558072
13. Dimension drawing		

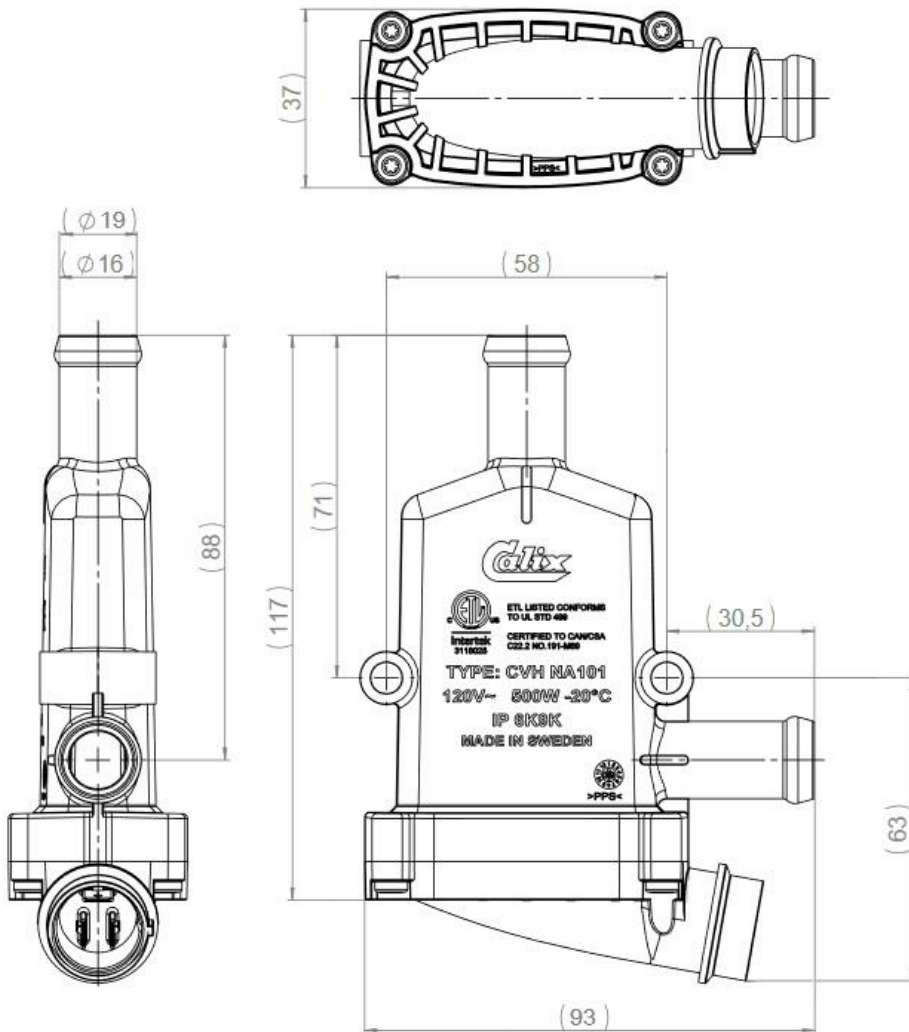

Subject:	Data:	Note:
-----------------	--------------	--------------

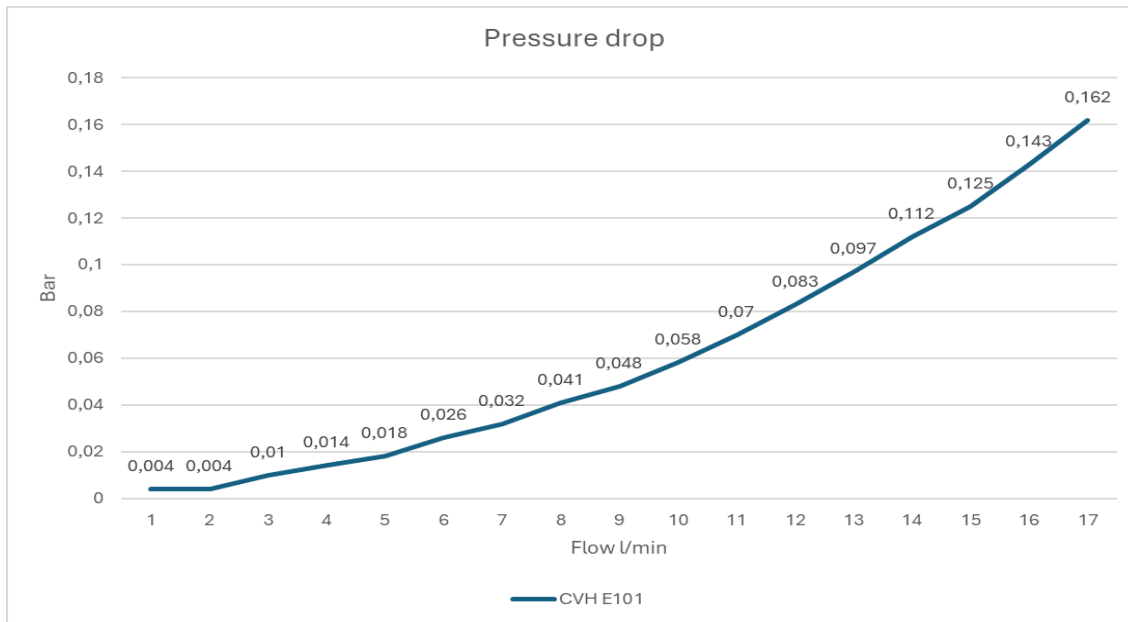14. Pressure drop diagram

We reserve the right to change technical data without prior notice.